



CNC - A/DF- P25 + RTC (L) 25 MIDI LUG CAP LINE




- | | | | | |
|-----------------|---|------------------------|--|--|
| Material | <ul style="list-style-type: none"> • Tinplate • DR-TFS • 0,14+ | Tooling | <ul style="list-style-type: none"> • up to 6-out | Belt transfer system |
| Capacity | <ul style="list-style-type: none"> • up to 1200 caps/min. | Changeover Time | <ul style="list-style-type: none"> • < 3 hours incl. tool change | Optional:
<ul style="list-style-type: none"> integrated cleaning integrated lining |
| | | | | <ul style="list-style-type: none"> • Playfree preloaded antifriction roller guidance |

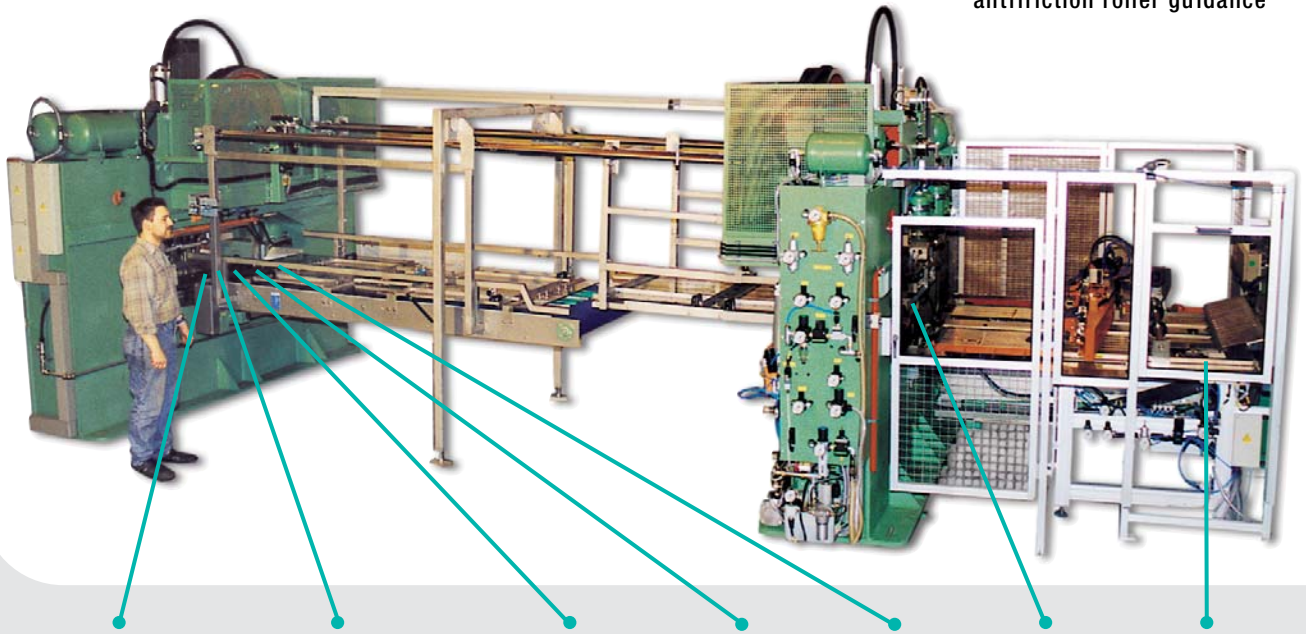

LINE ← LUG ← CURL ← COAX ← CLEAN ← SHELL ← SHEET

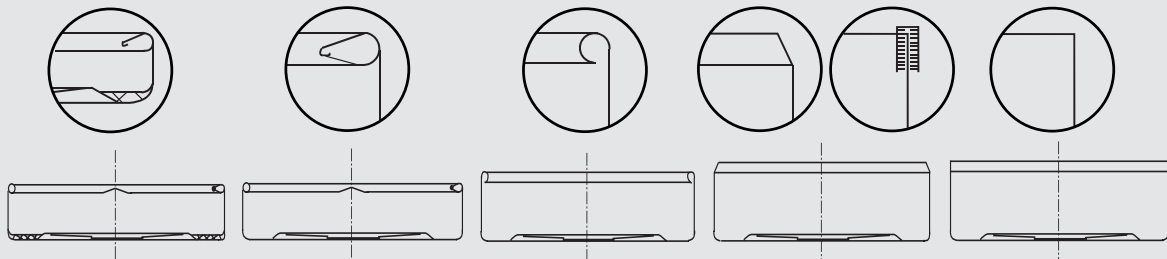

**CURLING, LUGGING, LINING PRESS RTC(L)25
MIDI LUG CAP LINE**

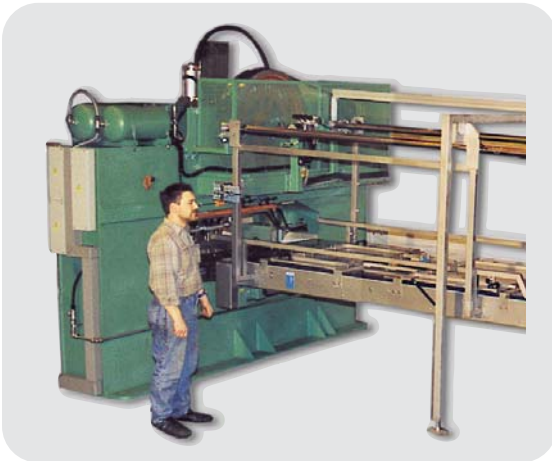

TECHNICAL DATA

TYPE:	RTC (L) 25
CAPACITY:	25 t
STROKE LENGTH:	120 mm
VARIABLE SPEED MAX:	100 - 200 rpm
MAIN DRIVE:	7,5 kW
DRIVE:	DIRECT
TOOLING:	up to 6-out
CAP DIAMETER:	30 mm - 115 mm 1.18 inch - 4.53 inch

