


According to ADR / EN 13083, EN 13315



All couplings:

- Nominal pressure 10 bar (tested up to 80 bar)
- Short construction length, TW3-flange or TTMA fixture!
- Low pressure loss for higher delivery rates
- Exchangeable flange ring
 - Bronze for best duration and highest conductivity as standard
 - Stainless steel for aircraft refuelling
- Pressure proved sight glass up to 50 bar!
- Optional for wet leg sensor
- Optional integrated magnetic sensor (type ...OM) for recording of opening state (open/close)
 - applicable for Sealed Compartment Delivery System (SCDS) :
 - valve head closes the coupling liquid-tight until electronic sensor has acknowledged opening
- closing cap CAPI pressure tight with safety lock to ADR 2007
- TÜV-certified, component label: TÜ.AGG.342-01, TÜ.AGG.234-95, TÜ.AGG.232-95, TÜ.AGG.154-92 for application according to ADR B1A, ADR 2001, chapter 6.8

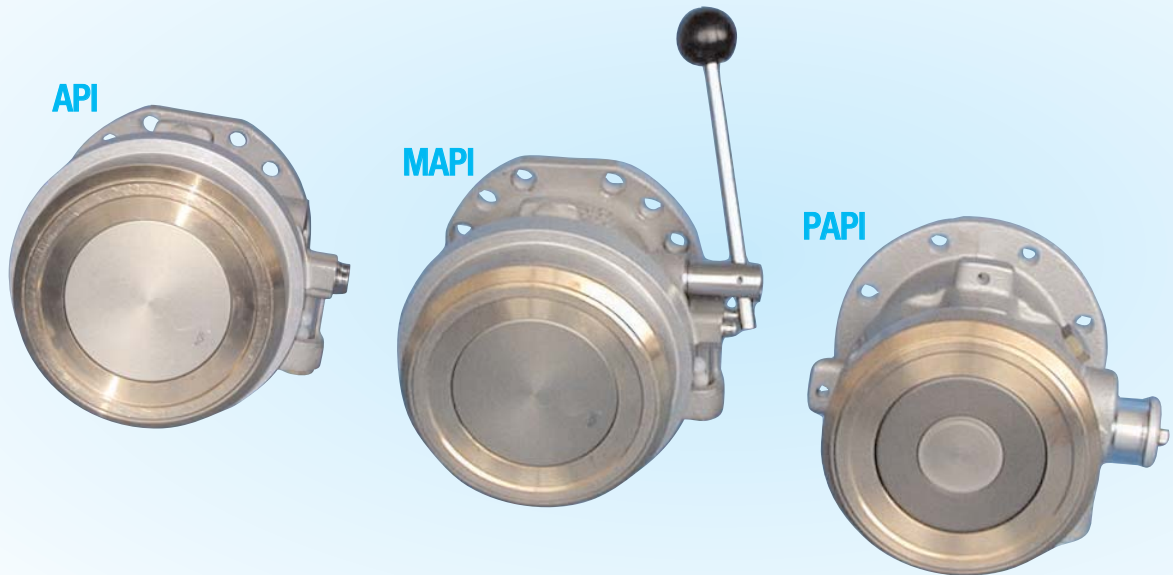