


CNC-AF/DF-PV40+(R)TP(V)40 DRAW/REDRAW LINE & TRIMMING




- MATERIAL**
- Aluminum
 - Tinplate
 - DR-TFS

- CAPACITY** • up to 600 cans/min
- TOOLING**
- 2-, 3- and 4-out
 - tool steel or carbide

- Changeover Time < 3 hours incl. tool change
- Hydraulic overload safety device
- Playfree preloaded antifriction roller guidance

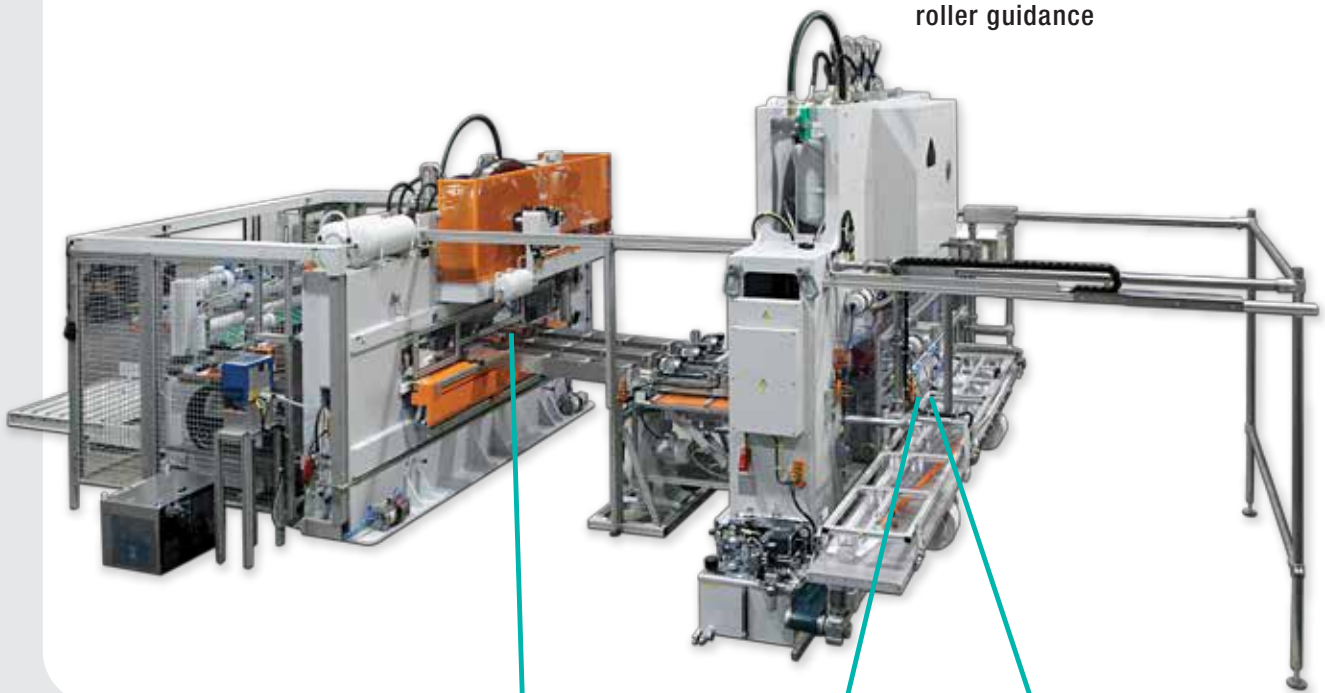

CUPPING → **REDRAW** → **PANELING/TRIMMING**

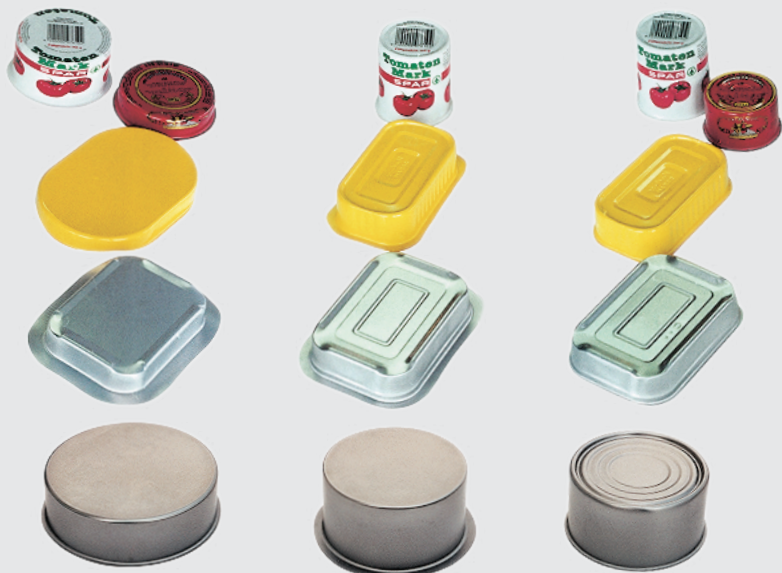

CNC-AF/DF-PV40+(R)TP(V)40 DRAW/REDRAW LINE & TRIMMING



TECHNICAL DATA

TYPE:	RTPV 40
CAPACITY:	40t
STROKE LENGTH:	170/190 mm
SPEED MAX:	80-150 rpm
TOOLING:	1-4-out
DRIVING POWER:	18,5 kW
DRIVE:	GEARING
CAN DIAMETER:	100 mm 3.937 inch
CAN HEIGHT:	50 mm; 1.772 inch
SHEET SIZE:	1150 x 1000 mm 45 x 39 inch

